



HDCVI PRODUCT SELECTION

HDCVI Camera/PTZ/HCVR/Accessories/Video Software

2016 Ver. 3

CONTENTS

●	HDCVI Camera	05 - 19
	Ultra Series	
	Pro Series	
	Lite Series	
●	HDCVI PTZ Camera	20 - 25
	Pro Series	
	Lite Series	
●	HDCVI HCVR	26 - 36
	4MP Series	
	1080P Pro Series	
	1080P Lite Series	
	720P Series	
●	Accessories	37 - 43
●	Video Software	44 - 45


HDCVI SOLUTION



HDCVI TECHNOLOGY

Bring HD video into coaxial cable with patented IP rights

Dahua Technology releases High Definition Composite Video Interface (HDCVI) technology with patented Intellectual Property Rights. HDCVI is an over-coaxial-cable video transmission standard, allowing reliable long-distance HD video transmission in wide application scenarios at friendly cost.

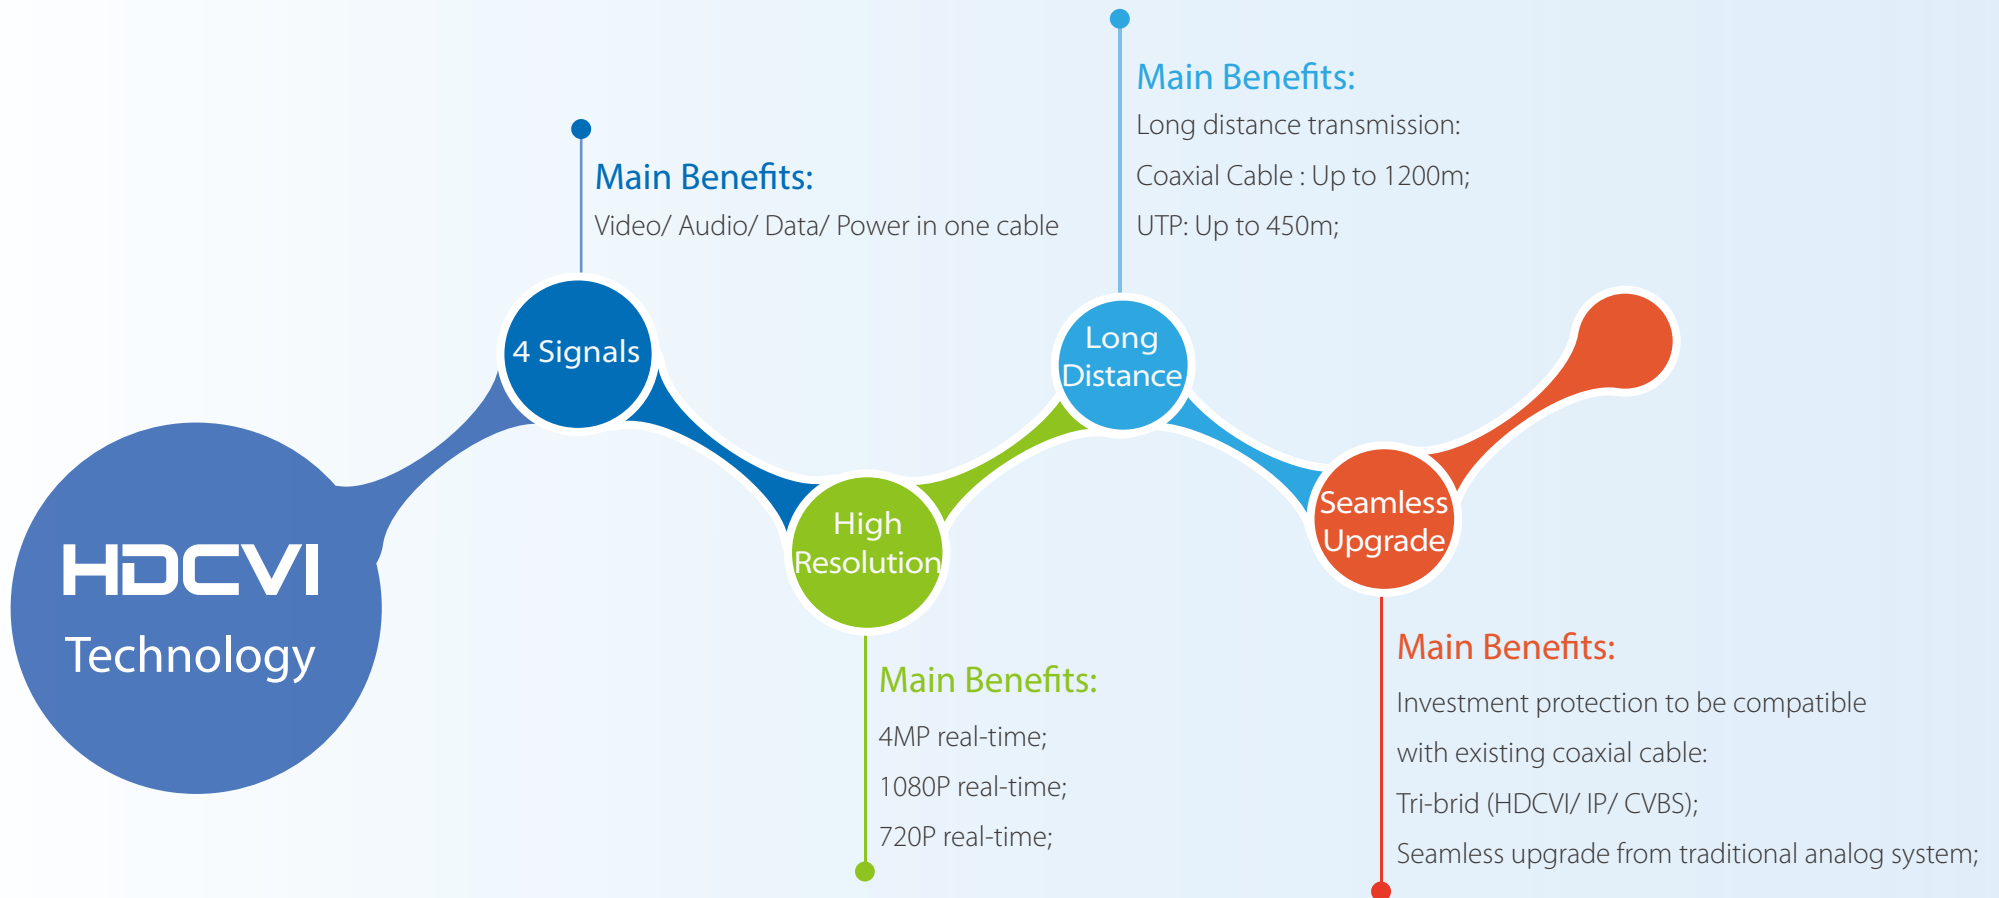

HDCVI CAMERA



HDCVI CAMERA








Ultra Series

- Superior image performance: Sony Exmor sensor, Starlight™ ability, true WDR up to 120dB
- Auto-iris motorized lens
- Project-oriented features: multi-language OSD, AC24V/DC12V, optional heater
- Multiple interfaces: audio in, alarm in/out, tester-out interface
- Elegant appearance

Ultra Series		
	1080P Starlight	
	HAC-HF3232	HAC-HF3231E
Model	 	 
Image Sensor	1/1.9" 2Mp Exmor CMOS	1/2.8" 2Mp Exmor R CMOS
Min. Illumination	0.002Lux/F1.2 (Color) 0.0002Lux/F1.2 (B/W)	0.005Lux/F1.2 (Color) 0.0005Lux/F1.2 (B/W)
Lens	C/CS, Auto Iris	C/CS, Auto Iris
FOV-H	-	-
Day/Night	ICR	ICR
Max. IR Distance	-	-
OSD Menu	Multi-language	Multi-language
WDR	140dB	120dB
Noise Reduction	2D/3D	2D/3D
Frame Rate	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P
Video Output	HD/SD Switchable	HD/SD Dual-output SDI Output 
Audio In	1	1
Alarm In/Out	1/1	2/1
Pan/Tilt/Rotation	-	-
Ingress Protection	-	-
Working Temperature	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)
Power	AC24V±10%/DC12V±10% Max. 8.7W	AC24V±25%/DC12V±25% Max. 4.7W


 Optional










Ultra Series					
	1080P Starlight				Pinhole
	HAC-HFW3231E-Z	HAC-HFW3231E-ZH	HAC-HDBW3231E-Z	HAC-HDBW3231E-ZH	HAC-HUM3100B
Model	 starlight	 starlight	 starlight	 starlight	
Image Sensor	1/2.8" 2Mp Exmor R CMOS	1/2.8" 2Mp Exmor R CMOS	1/2.8" 2Mp Exmor R CMOS	1/2.8" 2Mp Exmor R CMOS	1/2.9" 1Mp CMOS
Min. Illumination	0.005Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.005Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.005Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.005Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.05Lux/F2.8 (Color) 0.005Lux/F2.8 (B/W)
Lens	2.7~12mm Motorized, Auto Iris	2.7~12mm Motorized, Auto Iris	2.7~12mm Motorized, Auto Iris	2.7~12mm Motorized, Auto Iris	3.6mm
FOV-H	95°~36°	95°~36°	95°~36°	95°~36°	79.7°
Day/Night	ICR	ICR	ICR	ICR	Electronic
Max. IR Distance	100m (328ft), Smart IR	100m (328ft), Smart IR	50m (164ft), Smart IR	50m (164ft), Smart IR	-
OSD Menu	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language
WDR	120dB	120dB	120dB	120dB	DWDR
Noise Reduction	2D/3D	2D/3D	2D/3D	2D/3D	2D
Frame Rate	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30/60fps@720P
Video Output	HD/SD Dual-output, SD Tester-out, SDI Output ■	HD/SD Dual-output, SD Tester-out	HD/SD Dual-output, SD Tester-out, SDI Output ■	HD/SD Dual-output, SD Tester-out	HD
Audio In	1	1	1	1	1
Alarm In/Out	1/1	1/1	1/1	1/1	-
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~355°; Tilt: 0°~65° Rotation: 0°~355°	Pan: 0°~355°; Tilt: 0°~65° Rotation: 0°~355°	Pan: 0°~360°; Tilt: 0°~360° Rotation: NA
Ingress Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10	-
Working Temperature	-30°C~+60°C (-22°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)
Power	AC24V±25%/DC12V±25% Max. 16.6W	AC24V±25%/DC12V±25% Max. 22.9W	AC24V±25%/DC12V±25% Max. 12.5W	AC24V±25%/DC12V±25% Max. 21.5W	DC12V±10% Max. 1.5W








■ Optional









Pro Series

- High resolution up to 4MP, real-time monitoring
- Adopting high performance ISP and image sensor
- True WDR up to 120dB, clear image with rich details even under backlight
- Motorized/vari-focal/fixed lens models of 10+ original Dahua design
- Multi-language OSD and HD & SD output suit different applications


Pro Series				
4MP True WDR				
	HAC-HFW2401R-Z-IRE6	HAC-HFW2401R-Z-IRE6-DP	HAC-HDBW2401R-Z	HAC-HDBW2401R-Z-DP
Model				
Image Sensor	1/3" 4Mp CMOS	1/3" 4Mp CMOS	1/3" 4Mp CMOS	1/3" 4Mp CMOS
Min. Illumination	0.03Lux/F1.8 (Color) 0Lux/F1.8 (IR On)	0.03Lux/F1.8 (Color) 0Lux/F1.8 (IR On)	0.03Lux/F1.8 (Color) 0Lux/F1.8 (IR On)	0.03Lux/F1.8 (Color) 0Lux/F1.8 (IR On)
Lens	2.7~12mm, Motorized	2.7~12mm, Motorized	2.7~12mm, Motorized	2.7~12mm, Motorized
FOV-H	100°~35°	100°~35°	100°~35°	100°~35°
Day/Night	ICR	ICR	ICR	ICR
Max. IR Distance	60m (197ft), Smart IR	60m (197ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR
OSD Menu	Multi-language	Multi-language	Multi-language	Multi-language
WDR	120dB	120dB	120dB	120dB
Noise Reduction	2D/3D	2D/3D	2D/3D	2D/3D
Frame Rate	30fps@4M, 30fps@1080P, 30/60fps@720P	30fps@4M, 30fps@1080P, 30/60fps@720P	30fps@4M, 30fps@1080P, 30/60fps@720P	30fps@4M, 30fps@1080P, 30/60fps@720P
Video Output	HD/SD Dual-output	HD/SD Dual-output	HD/SD Dual-output, SD Tester-out	HD/SD Dual-output, SD Tester-out
Audio In	-	-	-	-
Alarm In/Out	-	-	-	-
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~355°; Tilt: 0°~75° Rotation: 0°~355°	Pan: 0°~355°; Tilt: 0°~75° Rotation: 0°~355°
Ingress Protection	IP67	IP67	IP67, IK10	IP67, IK10
Working Temperature	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)
Power	DC12V±25% Max. 8.2W	AC24V±25%/DC12V±25% Max. 11.4W	DC12V±25% Max. 7.1W	AC24V±25%/DC12V±25% Max. 9.8W

Pro Series									
4M True WDR									
Model	HAC-HDW2401R-Z	HAC-HDW2401R-Z-DP	HAC-HFW2401D	HAC-HFW2401E	HAC-HFW2401S	HAC-HDBW2401E	HAC-HDW2401EM	HAC-HDW2401M	HAC-HDW2401S
									
Image Sensor	1/3" 4Mp CMOS	1/3" 4Mp CMOS	1/3" 4Mp CMOS	1/3" 4Mp CMOS	1/3" 4Mp CMOS	1/3" 4Mp CMOS	1/3" 4Mp CMOS	1/3" 4Mp CMOS	1/3" 4Mp CMOS
Min. Illumination	0.03Lux/F1.8 (Color) 0Lux/F1.8 (IR On)	0.03Lux/F1.8 (Color) 0Lux/F1.8 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)
Lens	2.7~12mm, Motorized	2.7~12mm, Motorized	3.6mm (6mm, 8mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (2.8mm, 6mm Optional)
FOV-H	100°~35°	100°~35°	78°(52.5°/32.9°)	78°(99.7°/52.5°)	78°(99.7°/52.5°)	78°(99.7°/52.5°)	78°(99.7°/52.5°)	78°(99.7°/52.5°)	78°(99.7°/52.5°)
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR	ICR	ICR	ICR
Max. IR Distance	60m (197ft), Smart IR	60m (197ft), Smart IR	80m (262ft), Smart IR	40m (131ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR	50m (164ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR
OSD Menu	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language
WDR	120dB	120dB	120dB	120dB	120dB	120dB	120dB	120dB	120dB
Noise Reduction	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D
Frame Rate	30fps@4M, 30fps@1080P, 30/60fps@720P	30fps@4M, 30fps@1080P, 30/60fps@720P	30fps@4M, 30fps@1080P, 30/60fps@720P	30fps@4M, 30fps@1080P, 30/60fps@720P	30fps@4M, 30fps@1080P, 30/60fps@720P	30fps@4M, 30fps@1080P, 30/60fps@720P	30fps@4M, 30fps@1080P, 30/60fps@720P	30fps@4M, 30fps@1080P, 30/60fps@720P	30fps@4M, 30fps@1080P, 30/60fps@720P
Video Output	HD/SD Dual-output	HD/SD Dual-output	HD/SD Dual-output	HD/SD Dual-output	HD/SD Dual-output	HD/SD Dual-output, SD Tester-out	HD/SD Dual-output	HD/SD Dual-output	HD/SD Dual-output
Audio In	-	-	-	-	-	-	-	-	-
Alarm In/Out	-	-	-	-	-	-	-	-	-
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~67° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~67° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~355°; Tilt: 0°~65° Rotation: 0°~355°	Pan: 0°~360°; Tilt: 0°~78° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°
Ingress Protection	IP67	IP67	IP67	IP67	IP67	IP67, IK10	IP67	IP67	IP67
Working Temperature	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)
Power	DC12V±25% Max. 8.2W	AC24V±25%/DC12V±25% Max. 11.4W	DC12V±25% Max. 7W	DC12V±25% Max. 7W	DC12V±25% Max. 5.9W	DC12V±25% Max. 4.8W	DC12V±25% Max. 6.1W	DC12V±25% Max. 4.8W	DC12V±25% Max. 4.8W

Pro Series							
1080P True WDR							
Model	HAC-HFW2221R-Z-IRE6	HAC-HFW2221R-Z-IRE6-DP	HAC-HDBW2221R-Z	HAC-HDBW2221R-Z-DP	HAC-HDW2221R-Z	HAC-HDW2221R-Z-DP	HAC-HFW2221D
							
Image Sensor	1/2.7" 2Mp CMOS	1/2.7" 2Mp CMOS	1/2.7" 2Mp CMOS	1/2.7" 2Mp CMOS	1/2.7" 2Mp CMOS	1/2.7" 2Mp CMOS	1/2.7" 2Mp CMOS
Min. Illumination	0.03Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.03Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.03Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.03Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.03Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.03Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)
Lens	2.7~12mm (7~22mm Optional), Motorized	2.7~12mm, Motorized	2.7~12mm, Motorized	2.7~12mm, Motorized	2.7~12mm, Motorized	2.7~12mm, Motorized	3.6mm (6mm, 8mm, 12mm Optional)
FOV-H	99°~37°(41°~17.5°)	99°~37°	99°~37°	99°~37°	99°~37°	99°~37°	90°(59.4°/41.4°/26.5°)
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR	ICR
Max. IR Distance	60m (197ft), Smart IR	60m (197ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR	60m (197ft), Smart IR	60m (197ft), Smart IR	80m (262ft), Smart IR
OSD Menu	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language
WDR	120dB	120dB	120dB	120dB	120dB	120dB	120dB
Noise Reduction	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D
Frame Rate	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P
Video Output	HD/SD Dual-output	HD/SD Dual-output	HD/SD Dual-output, SD Tester-out	HD/SD Dual-output, SD Tester-out	HD/SD Dual-output	HD/SD Dual-output	HD/SD Dual-output
Audio In	-	-	-	-	-	-	-
Alarm In/Out	-	-	-	-	-	-	-
Pan/Tilt/Rotation	Pan: 0°~360°, Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~360°, Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~355°, Tilt: 0°~75° Rotation: 0°~355°	Pan: 0°~355°, Tilt: 0°~75° Rotation: 0°~355°	Pan: 0°~360°, Tilt: 0°~67° Rotation: 0°~360°	Pan: 0°~360°, Tilt: 0°~67° Rotation: 0°~360°	Pan: 0°~360°, Tilt: 0°~87° Rotation: 0°~360°
Ingress Protection	IP67	IP67	IP67, IK10	IP67, IK10	IP67	IP67	IP67
Working Temperature	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)
Power	DC12V±25% Max. 8.2W	AC24V±25%/DC12V±25% Max. 16.7W	DC12V±25% Max. 5W	AC24V±25%/DC12V±25% Max. 10W	DC12V±25% Max. 10W	AC24V±25%/DC12V±25% Max. 12W	DC12V±25% Max. 5.7W

Pro Series								
1080P True WDR								
	HAC-HFW2221E	HAC-HFW2221S	HAC-HDBW2221E	HAC-HDBW2221F	HAC-HDW2221E	HAC-HDW2221EM(-A)	HAC-HDW2221M	HAC-HDW2221S
Model								
Image Sensor	1/2.7" 2Mp CMOS	1/2.7" 2Mp CMOS	1/2.7" 2Mp CMOS	1/2.7" 2Mp CMOS	1/2.7" 2Mp CMOS	1/2.7" 2Mp CMOS	1/2.7" 2Mp CMOS	1/2.7" 2Mp CMOS
Min. Illumination	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.03Lux/F2.0 (Color) 0Lux/F2.0 (IR On)
Lens	3.6mm (6mm, 8mm Optional)	3.6mm (2.8mm, 6mm, 8mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (2.8mm, 6mm, 8mm Optional)	3.6mm (2.8mm, 6mm, 8mm Optional)	3.6mm (6mm Optional)	3.6mm (6mm Optional)
FOV-H	90°(59.4°/41.4°)	90°(115.6°/59.4°/41.4°)	90°(115.6°/59.4°)	90°(115.6°/59.4°)	90°(115.6°/59.4°/41.4°)	90°(115.6°/59.4°/41.4°)	90°(59.4°)	90°(59.4°)
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR	ICR	ICR
Max. IR Distance	40m (131ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR	20m (66ft), Smart IR	50m (164ft), Smart IR	50m (164ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR
OSD Menu	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language
WDR	120dB	120dB	120dB	120dB	120dB	120dB	120dB	120dB
Noise Reduction	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D
Frame Rate	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P
Video Output	HD/SD Dual-output	HD/SD Dual-output	HD/SD Dual-output, SD Tester-out	HD/SD Dual-output, SD Tester-out	HD/SD Dual-output	HD/SD Dual-output	HD/SD Dual-output	HD/SD Dual-output
Audio In	-	-	-	Built-in Mic	-	Built-in Mic(-A)	-	-
Alarm In/Out	-	-	-	-	-	-	-	-
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~355°; Tilt: 0°~65° Rotation: 0°~355°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~60°; Tilt: 0°~80° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~70° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~78° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°
Ingress Protection	IP67	IP67	IP67, IK10	IP67, IK10	IP67	IP67	IP67	IP67
Working Temperature	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)	-30°C~+60°C (-22°F ~ +140°F)
Power	DC12V±25% Max. 5.5W	DC12V±25% Max. 4.5W	DC12V±25% Max. 5.5W	DC12V±25% Max. 3.5W	DC12V±25% Max. 5.5W	DC12V±25% Max. 5.5W	DC12V±25% Max. 4W	DC12V±25% Max. 4W

HDCVI CAMERA

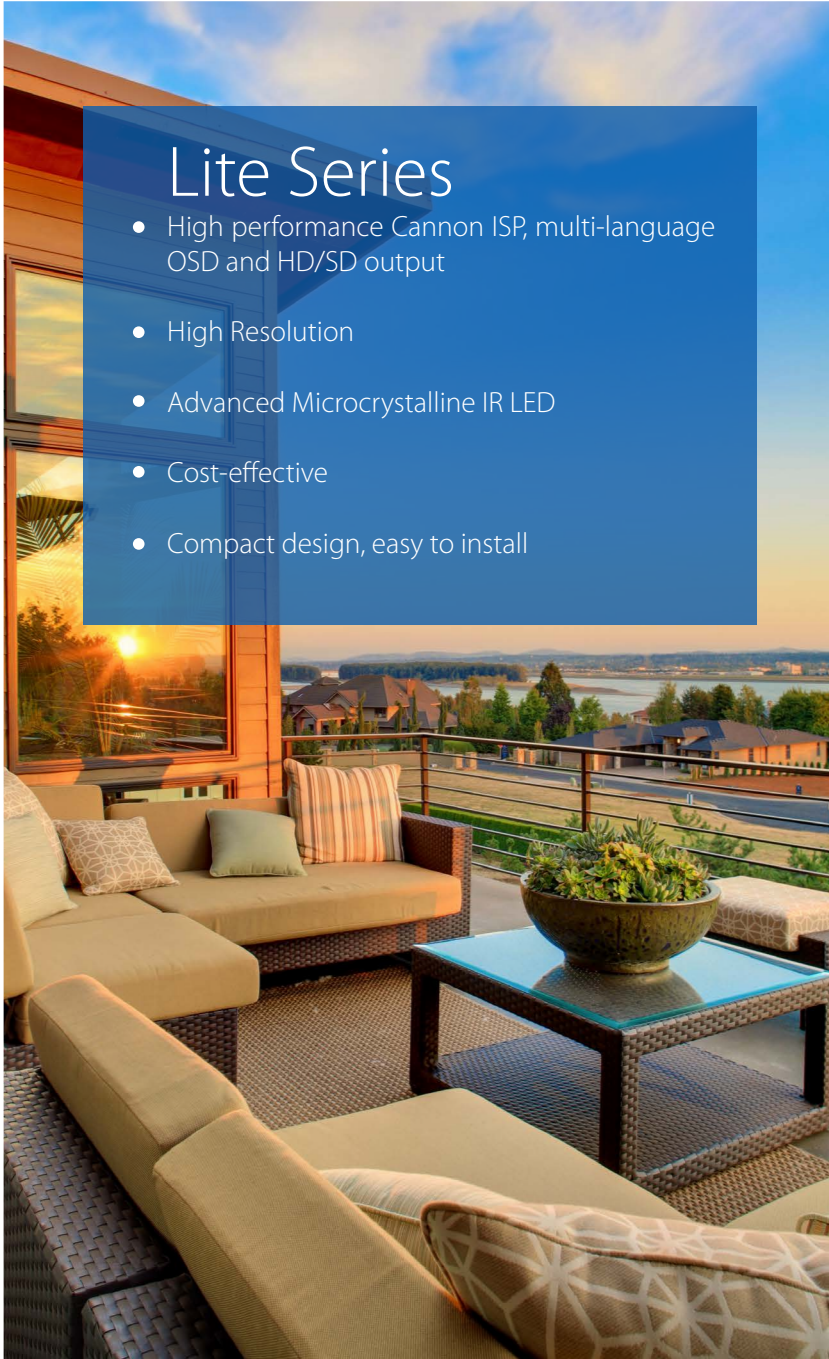








Lite Series

- High performance Cannon ISP, multi-language OSD and HD/SD output
- High Resolution
- Advanced Microcrystalline IR LED
- Cost-effective
- Compact design, easy to install

Lite Series				
1080P				
	HAC-HFW1220R-VF-IRE6	HAC-HFW1200R-VF-IRE6	HAC-HFW1220R-VF	HAC-HFW1200R-VF
Model	 <small>Cannon</small>	 <small>Cannon</small>	 <small>Cannon</small>	 <small>Cannon</small>
Image Sensor	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS
Min. Illumination	0.02Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.02Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.02Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.02Lux/F1.4 (Color) 0Lux/F1.4 (IR On)
Lens	2.7~12mm, Manual	2.7~12mm, Manual	2.7~12mm, Manual	2.7~12mm, Manual
FOV-H	105.7°~32.8°	99°~37°	105.7°~32.8°	99°~37°
Day/Night	ICR	ICR	ICR	ICR
Max. IR Distance	60m (197ft), Smart IR	60m (197ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR
OSD Menu	Multi-language	Multi-language	Multi-language	Multi-language
WDR	DWDR	DWDR	DWDR	DWDR
Noise Reduction	2D	2D	2D	2D
Frame Rate	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P
Video Output	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable
Audio In	-	-	-	-
Alarm In/Out	-	-	-	-
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°
Ingress Protection	IP67	IP67	IP67	IP67
Working Temperature	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)
Power	DC12V±25% Max. 8.5W	DC12V±25% Max. 8.5W	DC12V±25% Max. 3.8W	DC12V±25% Max. 3.8W













Lite Series

	1080P					
	HAC-HDBW1220R-VF	HAC-HDBW1200R-VF	HAC-HDW1220R-VF	HAC-HDW1200R-VF	HAC-HFW1220D	HAC-HFW1200D
Model	 	 	 	 	 	 
Image Sensor	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS
Min. Illumination	0.02Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.02Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.02Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.02Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)
Lens	2.7~12mm, Manual	2.7~12mm, Manual	2.7~12mm, Manual	2.7~12mm, Manual	3.6mm (6mm, 8mm Optional)	3.6mm (6mm, 8mm Optional)
FOV-H	105.7°~32.8°	99°~37°	105.7°~32.8°	99°~37°	82.8°(51.2°/35.1°)	89.9°(59.4°/41.4°)
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
Max. IR Distance	30m (98ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR	80m (262ft), Smart IR	80m (262ft), Smart IR
OSD Menu	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language
WDR	DWDR	DWDR	DWDR	DWDR	DWDR	DWDR
Noise Reduction	2D	2D	2D	2D	2D	2D
Frame Rate	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P
Video Output	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable
Audio In	-	-	-	-	-	-
Alarm In/Out	-	-	-	-	-	-
Pan/Tilt/Rotation	Pan: 0°~355°; Tilt: 0°~75° Rotation: 0°~355°	Pan: 0°~355°; Tilt: 0°~75° Rotation: 0°~355°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°
Ingress Protection	IP67, IK10	IP67, IK10	IP67	IP67	IP67	IP67
Working Temperature	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)
Power	DC12V±25% Max. 5.8W	DC12V±25% Max. 5.8W	DC12V±25% Max. 3.8W	DC12V±25% Max. 3.8W	DC12V±25% Max. 5W	DC12V±25% Max. 5W







Lite Series







	1080P					
	HAC-HFW1220B	HAC-HFW1200B	HAC-HFW1220S	HAC-HFW1200S	HAC-HFW1220SL	HAC-HFW1200SL
Model	 Cannon	 Cannon	 Cannon	 Cannon	 Cannon	 Cannon
Image Sensor	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS
Min. Illumination	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)
Lens	3.6mm (2.8mm, 6mm, 8mm Optional)	3.6mm (6mm, 8mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (6mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (6mm, 8mm Optional)
FOV-H	82.8°(106°/51.2°/35.1°)	89.9°(59.4°/41.4°)	82.8°(106°/51.2°)	89.9°(59.4°)	82.8°(106°/51.2°)	89.9°(59.4°/41.4°)
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
Max. IR Distance	50m (164ft), Smart IR	50m (164ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR
OSD Menu	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language
WDR	DWDR	DWDR	DWDR	DWDR	DWDR	DWDR
Noise Reduction	2D	2D	2D	2D	2D	2D
Frame Rate	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P
Video Output	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable
Audio In	-	-	-	-	-	-
Alarm In/Out	-	-	-	-	-	-
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°
Ingress Protection	IP67	IP67	IP67	IP67	IP67	IP67
Working Temperature	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)
Power	DC12V±25% Max. 4.5W	DC12V±25% Max. 4.5W	DC12V±25% Max. 2.8W	DC12V±25% Max. 4W	DC12V±25% Max. 3.8W	DC12V±25% Max. 4W

















Lite Series

	1080P					
	HAC-HFW1220RM	HAC-HFW1200RM	HAC-HFW1220R	HAC-HFW1200R	HAC-HDBW1220E	HAC-HDBW1200E
Model	 	 	 	 	 	 
Image Sensor	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS
Min. Illumination	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)
Lens	3.6mm (2.8mm, 6mm Optional)	3.6mm (6mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (6mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (2.8mm, 6mm Optional)
FOV-H	82.8°(106°/51.2°)	89.9°(59.4°)	82.8°(106°/51.2°)	89.9°(59.4°)	82.8°(106°/51.2°)	89.9°(115.6°/59.4°)
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
Max. IR Distance	20m (66ft), Smart IR	20m (66ft), Smart IR	20m (66ft), Smart IR	20m (66ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR
OSD Menu	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language
WDR	DWDR	DWDR	DWDR	DWDR	DWDR	DWDR
Noise Reduction	2D	2D	2D	2D	2D	2D
Frame Rate	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P
Video Output	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable
Audio In	-	-	-	-	-	-
Alarm In/Out	-	-	-	-	-	-
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~355°; Tilt: 0°~65° Rotation: 0°~355°	Pan: 0°~355°; Tilt: 0°~65° Rotation: 0°~355°
Ingress Protection	IP67	IP67	IP67	IP67	IP67, IK10	IP67, IK10
Working Temperature	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)
Power	DC12V±25% Max. 2.8W	DC12V±25% Max. 3W	DC12V±25% Max. 2.8W	DC12V±25% Max. 2.3W	DC12V±25% Max. 3.5W	DC12V±25% Max. 3.5W













Lite Series

	720P					
	HAC-HDW1220EM(-A)	HAC-HDW1200EM(-A)	HAC-HDW1220M	HAC-HDW1200M	HAC-HDW1220R	HAC-HDW1200R
Model	 Cannon	 Cannon	 Cannon	 Cannon	 Cannon	 Cannon
Image Sensor	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS	1/2.9" 2Mp Exmor CMOS	1/2.7" 2Mp CMOS
Min. Illumination	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.02Lux/F2.0 (Color) 0Lux/F2.0 (IR On)
Lens	3.6mm (2.8mm, 6mm Optional)	3.6mm (6mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (6mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (6mm Optional)
FOV-H	82.8°(106°/51.2°)	89.9°(59.4°)	82.8°(106°/51.2°)	89.9°(59.4°)	82.8°(106°/51.2°)	89.9°(59.4°)
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
Max. IR Distance	50m (164ft), Smart IR	50m (164ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR	20m (66ft), Smart IR	20m (66ft), Smart IR
OSD Menu	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language
WDR	DWDR	DWDR	DWDR	DWDR	DWDR	DWDR
Noise Reduction	2D	2D	2D	2D	2D	2D
Frame Rate	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P	30fps@1080P, 30/60fps@720P
Video Output	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable
Audio In	Built-in Mic(-A)	Built-in Mic(-A)	-	-	-	-
Alarm In/Out	-	-	-	-	-	-
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~78° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~78° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°
Ingress Protection	IP67	IP67	IP67	IP67	-	-
Working Temperature	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+55°C (-40°F ~ +131°F)
Power	DC12V±25% Max. 2.9W	DC12V±25% Max. 4.5W	DC12V±25% Max. 2.8W	DC12V±25% Max. 2.8W	DC12V±25% Max. 2.8W	DC12V±25% Max. 2.8W

Lite Series						
720P						
Model	HAC-HFW1100R-VF-IRE6	HAC-HFW1100R-VF	HAC-HDBW1100R-VF	HAC-HDW1100R-VF	HAC-HFW1100D	HAC-HFW1100B
	 Cannon	 Cannon	 Cannon	 Cannon	 Cannon	 Cannon
Image Sensor	1/3" 1Mp CMOS	1/3" 1Mp CMOS	1/3" 1Mp CMOS	1/3" 1Mp CMOS	1/3" 1Mp CMOS	1/3" 1Mp CMOS
Min. Illumination	0.05Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.05Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.05Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.05Lux/F1.4 (Color) 0Lux/F1.4 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)
Lens	2.7~12mm, Manual	2.7~12mm, Manual	2.7~12mm, Manual	2.7~12mm, Manual	3.6mm (6mm, 8mm Optional)	3.6mm (2.8mm, 6mm, 8mm Optional)
FOV-H	91°~28°	91°~28°	91°~28°	91°~28°	78°(46°/39.4°)	78°(91.6°/46°/39.4°)
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
Max. IR Distance	60m (197ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR	80m (262ft), Smart IR	50m (164ft), Smart IR
OSD Menu	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language
WDR	DWDR	DWDR	DWDR	DWDR	DWDR	DWDR
Noise Reduction	2D	2D	2D	2D	2D	2D
Frame Rate	30fps@720P	30fps@720P	30fps@720P	30fps@720P	30fps@720P	30fps@720P
Video Output	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable
Audio In	-	-	-	-	-	-
Alarm In/Out	-	-	-	-	-	-
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~355°; Tilt: 0°~75° Rotation: 0°~355°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~87° Rotation: 0°~360°
Ingress Protection	IP67	IP67	IP67, IK10	IP67	IP67	IP67
Working Temperature	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)
Power	DC12V±25% Max. 8.5W	DC12V±25% Max. 3.2W	DC12V±25% Max. 3.2W	DC12V±25% Max. 2.8W	DC12V±25% Max. 4.8W	DC12V±25% Max. 4.2W

Lite Series								
720P								
Model	HAC-HFW1100S	HAC-HFW1000S	HAC-HFW1100SL	HAC-HFW1000SL	HAC-HFW1100RM	HAC-HFW1000RM	HAC-HFW1100R	HAC-HFW1000R
								
								
Image Sensor	1/3" 1Mp CMOS	1/4" 1Mp CMOS	1/3" 1Mp CMOS	1/4" 1Mp CMOS	1/3" 1Mp CMOS	1/4" 1Mp CMOS	1/3" 1Mp CMOS	1/4" 1Mp CMOS
Min. Illumination	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)
Lens	3.6mm (2.8mm, 6mm, Optional)	3.6mm (2.8mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (2.8mm Optional)	3.6mm (2.8mm, 6mm, Optional)	3.6mm (2.8mm Optional)	3.6mm (2.8mm, 6mm, Optional)	3.6mm (2.8mm Optional)
FOV-H	78°(91.6°/46°)	60°(83.4°)	78°(91.6°/46°)	60°(83.4°)	78°(91.6°/46°)	60°(83.4°)	78°(91.6°/46°)	60°(83.4°)
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR	ICR	ICR
Max. IR Distance	30m (98ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR	20m (66ft), Smart IR	20m (66ft), Smart IR	20m (66ft), Smart IR	20m (66ft), Smart IR
OSD Menu	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language
WDR	DWDR	DWDR	DWDR	DWDR	DWDR	DWDR	DWDR	DWDR
Noise Reduction	2D	2D	2D	2D	2D	2D	2D	2D
Frame Rate	30fps@720P	30fps@720P	30fps@720P	30fps@720P	30fps@720P	30fps@720P	30fps@720P	30fps@720P
Video Output	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable
Audio In	-	-	-	-	-	-	-	-
Alarm In/Out	-	-	-	-	-	-	-	-
Pan/Tilt/Rotation	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°
Ingress Protection	IP67	IP67	IP67	IP67	IP67	IP67	IP67	IP67
Working Temperature	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)
Power	DC12V±25% Max. 3.8W	DC12V±25% Max. 3.8W	DC12V±25% Max. 3.8W	DC12V±25% Max. 3.8W	DC12V±25% Max. 2.8W	DC12V±25% Max. 2.8W	DC12V±25% Max. 2.8W	DC12V±25% Max. 2.8W


Lite Series

	720P					
	HAC-HDBW1100E	HAC-HDW1100EM(-A)	HAC-HDW1100M	HAC-HDW1000M	HAC-HDW1100R	HAC-HDW1000R
Model	 	 	 	 	 	 
Image Sensor	1/3" 1Mp CMOS	1/3" 1Mp CMOS	1/3" 1Mp CMOS	1/4" 1Mp CMOS	1/3" 1Mp CMOS	1/4" 1Mp CMOS
Min. Illumination	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)	0.05Lux/F2.0 (Color) 0Lux/F2.0 (IR On)
Lens	3.6mm (2.8mm, 6mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (2.8mm Optional)	3.6mm (2.8mm, 6mm Optional)	3.6mm (2.8mm Optional)
FOV-H	78°(91.6°/46°)	78°(91.6°/46°)	78°(91.6°/46°)	60°(83.4°)	78°(91.6°/46°)	60°(83.4°)
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
Max. IR Distance	30m (98ft), Smart IR	50m (164ft), Smart IR	30m (98ft), Smart IR	30m (98ft), Smart IR	20m (66ft), Smart IR	20m (66ft), Smart IR
OSD Menu	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language	Multi-language
WDR	DWDR	DWDR	DWDR	DWDR	DWDR	DWDR
Noise Reduction	2D	2D	2D	2D	2D	2D
Frame Rate	30fps@720P	30fps@720P	30fps@720P	30fps@720P	30fps@720P	30fps@720P
Video Output	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable
Audio In	-	Built-in Mic(-A)	-	-	-	-
Alarm In/Out	-	-	-	-	-	-
Pan/Tilt/Rotation	Pan: 0°~355°; Tilt: 0°~65° Rotation: 0°~355°	Pan: 0°~360°; Tilt: 0°~78° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°	Pan: 0°~360°; Tilt: 0°~90° Rotation: 0°~360°
Ingress Protection	IP67, IK10	IP67	IP67	IP67	-	-
Working Temperature	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)	-40°C~+60°C (-40°F ~ +140°F)
Power	DC12V±25% Max. 3W	DC12V±25% Max. 3.8W	DC12V±25% Max. 2.8W	DC12V±25% Max. 2.8W	DC12V±25% Max. 2.8W	DC12V±25% Max. 2.8W

HDCVI PTZ CAMERA



HDCVI PTZ CAMERA

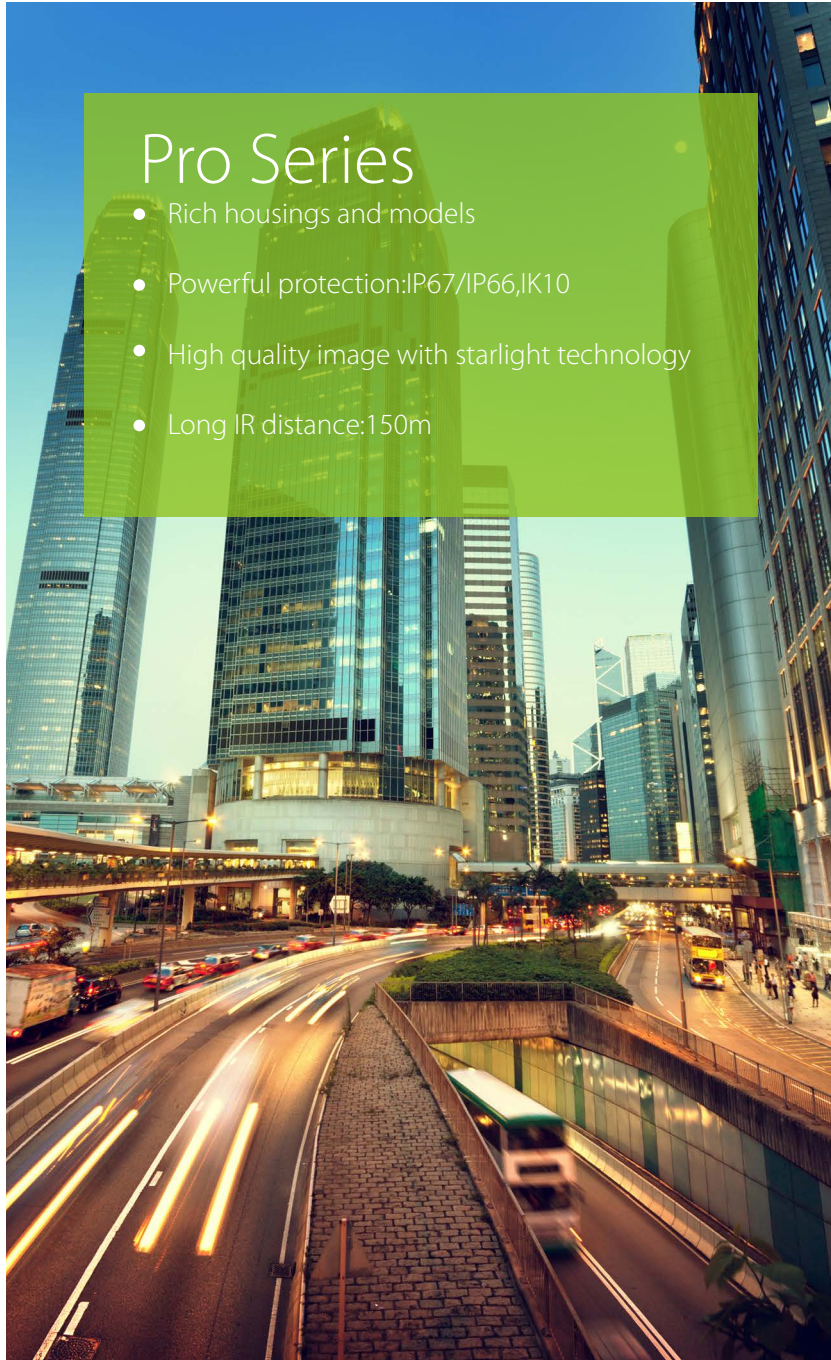




Pro Series

- Rich housings and models
- Powerful protection:IP67/IP66,IK10
- High quality image with starlight technology
- Long IR distance:150m

Pro Series

Outdoor IR PTZ Camera

	SD6CE230I-HC	SD6CE225I-HC	SD6CE131I-HC
Model	 starlight	 starlight	 starlight
Image Sensor	1/2.8" 2Mp Exmor R CMOS	1/2.8" 2Mp Exmor R CMOS	1/2.8" Exmor R CMOS
Min. Illumination	0.005Lux/F1.6(Color) 0Lux/F1.6 (IR on)	0.005Lux/F1.6(Color) 0Lux/F1.6 (IR on)	0.005Lux/F1.6(Color) 0Lux/F1.6 (IR on)
Lens	4.5~135mm(30x Optical zoom)	4.8~120mm (25x Optical zoom)	4.8~150mm(31x Optical zoom)
FOV-H	H: 67.8° ~ 2.7°	59.2° ~ 2.4°	H: 58.3° ~ 1.9°
Day/Night	ICR	ICR	ICR
Max. IR Distance	150m(492ft)	150m(492ft)	150m(492ft)
OSD Menu	Support	Support	Support
WDR	120dB True WDR	120dB True WDR	120dB True WDR
Noise Reduction	2D/3D	2D/3D	2D/3D
Frame Rate	30fps@1080P 30/60fps@720P	30fps@1080P 30/60fps@720P	30/60fps@720P
Video Output	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable
Pan/Tilt	Pan: 0° ~ 360° endless Tilt:-15° ~ 90°	Pan: 0° ~ 360° endless Tilt:-15° ~ 90°	Pan: 0° ~ 360° endless Tilt:-15° ~ 90°
Preset Speed	Pan: 240° /s Tilt: 200° /s	Pan: 240° /s Tilt: 200° /s	Pan: 240° /s Tilt: 200° /s
Audio In	1	1	1
Alarm In/Out	2/1	2/1	2/1
Ingress Protection	IP66	IP66	IP66
Working Temperature	-40°C ~ +70°C (-40°F~+158°F)	-40°C ~ +70°C (-40°F~+158°F)	-40°C ~ +70°C (-40°F~+158°F)
Power	AC24V Max. 26W	AC24V Max. 26W	AC24V Max. 26W

HDCVI PTZ CAMERA

Pro Series						
	Outdoor PTZ Camera			Outdoor IR PTZ Camera		
Model	SD60230I-HC	SD60225I-HC	SD60131I-HC	SD59230I-HC	SD59225I-HC	SD59131I-HC
		 starlight	 starlight	 starlight	 starlight	 starlight
Image Sensor	1/2.8" 2Mp Exmor R CMOS	1/2.8" 2Mp Exmor R CMOS	1/2.8" Exmor R CMOS	1/2.8" 2Mp Exmor R CMOS	1/2.8" 2Mp Exmor R CMOS	1/2.8" Exmor R CMOS
Min. Illumination	0.005Lux/F1.6(Color) 0.0005Lux/F1.6(B/W)	0.005Lux/F1.6(Color) 0.0005Lux/F1.6(B/W)	0.005Lux/F1.6(Color) 0.0005Lux/F1.6(B/W)	0.005Lux/F1.6(Color) 0Lux/F1.6 (IR on)	0.005Lux/F1.6(Color) 0Lux/F1.6 (IR on)	0.005Lux/F1.6(Color) 0Lux/F1.6 (IR on)
Lens	4.5~135mm(30x Optical zoom)	4.8~120mm (25x Optical zoom)	4.8~150mm(31x Optical zoom)	4.5~135mm(30x Optical zoom)	4.8~120mm (25x Optical zoom)	4.8~150mm(31x Optical zoom)
FOV-H	H: 67.8° ~ 2.7°	59.2° ~ 2.4°	H: 58.3° ~ 1.9°	H: 67.8° ~ 2.7°	59.2° ~ 2.4°	H: 58.3° ~ 1.9°
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
Max. IR Distance	--	--	--	150m(492ft)	150m(492ft)	150m(492ft)
OSD Menu	Support	Support	Support	Support	Support	Support
WDR	120dB True WDR	120dB True WDR	120dB True WDR	120dB True WDR	120dB True WDR	120dB True WDR
Noise Reduction	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D
Frame Rate	30fps@1080P 30/60fps@720P	30fps@1080P 30/60fps@720P	30/60fps@720P	30fps@1080P 30/60fps@720P	30fps@1080P 30/60fps@720P	30/60fps@720P
Video Output	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable
Pan/Tilt	Pan: 0° ~ 360° endless; Tilt: -20° ~ 90°	Pan: 0° ~ 360° endless; Tilt: -20° ~ 90°	Pan: 0° ~ 360° endless; Tilt: -20° ~ 90°	Pan: 0° ~ 360° endless; Tilt: -15° ~ 90°	Pan: 0° ~ 360° endless; Tilt: -15° ~ 90°	Pan: 0° ~ 360° endless; Tilt: -15° ~ 90°
Preset Speed	Pan: 600° /s Tilt: 500° /s	Pan: 600° /s Tilt: 500° /s	Pan: 600° /s Tilt: 500° /s	Pan: 400° /s Tilt: 300° /s	Pan: 400° /s Tilt: 300° /s	Pan: 400° /s Tilt: 300° /s
Audio In	1	1	1	1	1	1
Alarm In/Out	2/1	2/1	2/1	2/1	2/1	2/1
Ingress Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP66	IP66	IP66
Working Temperature	-40°C ~ +70°C (-40°F ~ +158°F)	-40°C ~ +70°C (-40°F ~ +158°F)	-40°C ~ +70°C (-40°F ~ +158°F)	-40°C ~ +70°C (-40°F ~ +158°F)	-40°C ~ +70°C (-40°F ~ +158°F)	-40°C ~ +70°C (-40°F ~ +158°F)
Power	AC24V Max. 20W	AC24V Max. 20W	AC24V Max. 20W	AC24V Max. 25W	AC24V Max. 25W	AC24V Max. 25W


HDCVI PTZ CAMERA

Pro Series						
	Outdoor PTZ Camera			Indoor PTZ Camera		
Model	SD50230I-HC	SD50225I-HC	SD50131I-HC	SD52C230I-HC	SD52C225I-HC	SD52C131I-HC
	 starlight	 starlight	 starlight	 starlight	 starlight	 starlight
Image Sensor	1/2.8" 2Mp Exmor R CMOS	1/2.8" 2Mp Exmor R CMOS	1/2.8" Exmor R CMOS	1/2.8" 2Mp Exmor R CMOS	1/2.8" 2Mp Exmor R CMOS	1/2.8" Exmor R CMOS
Min. Illumination	0.005Lux/F1.6(Color) 0.0005Lux/F1.6(B/W)	0.005Lux/F1.6(Color) 0.0005Lux/F1.6 (B/W)	0.005Lux/F1.6(Color) 0.0005Lux/F1.6 (B/W)	0.005Lux/F1.6(Color) 0.0005Lux/F1.6(B/W)	0.005Lux/F1.6(Color) 0.0005Lux/F1.6 (B/W)	0.005Lux/F1.6(Color) 0.0005Lux/F1.6 (B/W)
Lens	4.5~135mm(30x Optical zoom)	4.8~120mm (25x Optical zoom)	4.8~150mm(31x Optical zoom)	4.5~135mm(30x Optical zoom)	4.8~120mm (25x Optical zoom)	4.8~150mm(31x Optical zoom)
FOV-H	H: 67.8° ~ 2.7°	59.2° ~ 2.4°	H: 58.3° ~ 1.9°	H: 67.8° ~ 2.7°	59.2° ~ 2.4°	H: 58.3° ~ 1.9°
Day/Night	ICR	ICR	ICR	ICR	ICR	ICR
Max. IR Distance	--	--	--	--	--	--
OSD Menu	Support	Support	Support	Support	Support	Support
WDR	120dB True WDR	120dB True WDR	120dB True WDR	120dB True WDR	120dB True WDR	120dB True WDR
Noise Reduction	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D
Frame Rate	30fps@1080P 30/60fps@720P	30fps@1080P 30/60fps@720P	30/60fps@720P	30fps@1080P 30/60fps@720P	30fps@1080P 30/60fps@720P	30/60fps@720P
Video Output	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable
Pan/Tilt	Pan: 0° ~ 360° endless; Tilt: 0° ~ 90°	Pan: 0° ~ 360° endless; Tilt: 0° ~ 90°	Pan: 0° ~ 360° endless; Tilt: 0° ~ 90°	Pan: 0° ~ 360° endless; Tilt: 0° ~ 90°	Pan: 0° ~ 360° endless; Tilt: 0° ~ 90°	Pan: 0° ~ 360° endless; Tilt: 0° ~ 90°
Preset Speed	Pan: 500° /s Tilt: 500° /s	Pan: 500° /s Tilt: 500° /s	Pan: 500° /s Tilt: 500° /s	Pan: 500° /s Tilt: 500° /s	Pan: 500° /s Tilt: 500° /s	Pan: 500° /s Tilt: 500° /s
Audio In	1	1	1	1	1	1
Alarm In/Out	2/1	2/1	2/1	2/1	2/1	2/1
Ingress Protection	IP67, IK10	IP67, IK10	IP67, IK10	IK10	IK10	IK10
Working Temperature	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-40°C~+60°C (-40°F~+140°F)	-30°C ~ +60°C (-22°F~+140°F)	-30°C ~ +60°C (-22°F~+140°F)	-30°C ~ +60°C (-22°F~+140°F)
Power	AC24V Max. 23W	AC24V Max. 23W	AC24V Max. 23W	AC24V Max. 13W	AC24V Max. 13W	AC24V Max. 13W




HDCVI PTZ CAMERA

Lite Series

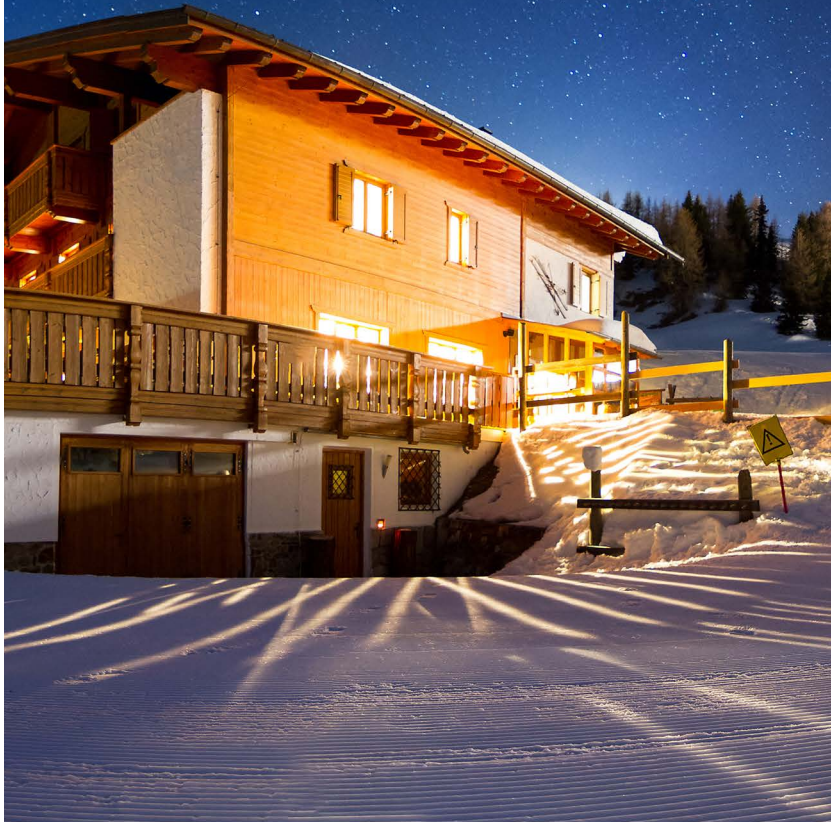




- Max.25x optical zoom PTZ brings more benefits
- Compact design
- Mini IR PTZ camera
- Competitive price



Lite Series

	Outdoor IR PTZ Camera	Outdoor PTZ Camera	
	SD49225I-HC	SD40212I-HC	SD40112I-HC
Model			
Image Sensor	1/2.8" 2Mp Exmor R CMOS	1/2.8" 2Mp Exmor CMOS	1/3" 1.3Mp Exmor CMOS
Min. Illumination	0.005Lux/F1.6(Color) 0Lux/F1.6 (IR on)	0.05Lux/F1.6(Color) 0.005Lux/F1.6(B/W)	0.05Lux/F1.6(Color) 0.005Lux/F1.6(B/W)
Lens	4.8~120mm (25x Optical zoom)	5.1~61.2mm (12x Optical zoom)	5.1~61.2mm (12x Optical zoom)
FOV-H	59.2° ~ 2.4°	H: 51.3° ~ 4.6°	H: 51.3° ~ 4.6°
Day/Night	ICR	ICR	ICR
Max. IR Distance	100m(328ft)	--	--
OSD Menu	Support	Support	Support
WDR	120dB True WDR	DWDR	DWDR
Noise Reduction	2D/3D	2D/3D	2D/3D
Frame Rate	30fps@1080P 30/60fps@720P	30fps@1080P 30/60fps@720P	30/60fps@720P
Video Output	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable
Pan/Tilt	Pan: 0° ~ 360° endless; Tilt:-15° ~ 90°	Pan: 0° ~ 360° endless Tilt:-2° ~ 90°	Pan: 0° ~ 360° endless Tilt:-2° ~ 90°
Preset Speed	Pan: 240°/s, Tilt:200°/s	Pan: 300°/s Tilt:200°/s	Pan: 300°/s Tilt:200°/s
Audio In	1	1	1
Alarm In/Out	2/1	2/1	2/1
Ingress Protection	IP66	IP66, IK10	IP66, IK10
Working Temperature	-40°C ~ +70°C (-40°F ~ +158°F)	-40°C ~ +60°C (-40°F ~ +140°F)	-40°C ~ +60°C (-40°F ~ +140°F)
Power	DC12V Max. 20W	AC24V Max. 19W	AC24V Max. 19W

Lite Series

	Indoor PTZ Camera				
Model	SD42212I-HC	SD42112I-HC	SD42C212I-HC	SD42C112I-HC	SD22204I-GC
					
Image Sensor	1/2.8" 2Mp Exmor CMOS	1/3" 1.3Mp Exmor CMOS	1/2.8" 2Mp Exmor CMOS	1/3" 1.3Mp Exmor CMOS	1/2.7" 2Mp CMOS
Min. Illumination	0.05Lux/F1.6(Color) 0.005Lux/F1.6(B/W)	0.05Lux/F1.6(Color) 0.005Lux/F1.6(B/W)	0.05Lux/F1.6(Color) 0.005Lux/F1.6(B/W)	0.05Lux/F1.6(Color) 0.005Lux/F1.6(B/W)	0.05Lux/F1.6(Color) 0.005Lux/F1.6(B/W)
Lens	5.1~61.2mm (12x Optical zoom)	5.1~61.2mm (12x Optical zoom)	5.1~61.2mm (12x Optical zoom)	5.1~61.2mm (12x Optical zoom)	2.7~11mm (4x Optical zoom)
FOV-H	H: 51.3° ~ 4.6°	H: 51.3° ~ 4.6°	H: 51.3° ~ 4.6°	H: 51.3° ~ 4.6°	H: 112.5° ~ 39°
Day/Night	ICR	ICR	ICR	ICR	ICR
Max. IR Distance	--	--	--	--	--
OSD Menu	Support	Support	Support	Support	Support
WDR	DWDR	DWDR	DWDR	DWDR	DWDR
Noise Reduction	2D/3D	2D/3D	2D/3D	2D/3D	2D/3D
Frame Rate	30fps@1080P 30/60fps@720P	30/60fps@720P	30fps@1080P 30/60fps@720P	30/60fps@720P	30fps@1080P 30/60fps@720P
Video Output	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable	HD/SD Switchable
Pan/Tilt	Pan: 0° ~ 360° endless Tilt: -2° ~ 90°	Pan: 0° ~ 360° endless Tilt: -2° ~ 90°	Pan: 0° ~ 360° endless Tilt: -2° ~ 90°	Pan: 0° ~ 360° endless Tilt: -2° ~ 90°	Pan: 0° ~ 355° Tilt: 0° ~ 90°
Preset Speed	Pan: 300°/s Tilt: 200°/s	Pan: 300°/s Tilt: 200°/s	Pan: 300°/s Tilt: 200°/s	Pan: 300°/s Tilt: 200°/s	Pan: 100°/s Tilt: 60°/s
Audio In	1	1	1	1	--
Alarm In/Out	2/1	2/1	2/1	2/1	--
Ingress Protection	IP66, IK10	IP66, IK10	IK10	IK10	IP66, IK10
Working Temperature	-30°C ~ +60°C (-22°F ~ +140°F)	-30°C ~ +60°C (-22°F ~ +140°F)	-30°C ~ +60°C (-22°F ~ +140°F)	-30°C ~ +60°C (-22°F ~ +140°F)	-30°C ~ +60°C (-22°F ~ +140°F)
Power	AC24V Max. 10W	AC24V Max. 10W	AC24V Max. 10W	AC24V Max. 10W	DC12V Max. 10W

HDCVI HCVR







1080P Pro Series

- Perfect image quality and performance
- Full 1080P real-time recording each channel
- High standard hardware
- Up to 64 channels IP input



1080P Pro Series


	8 HDD	4 HDD	2HDD	
Model	HCVR8816S-S3 	HCVR8416L-S3 	HCVR8216A-S3 	HCVR8208A-S3 
Video Compression	H.264	H.264	H.264	H.264
Audio Compression	G.711/PCM	G.711/PCM	G.711/PCM	G.711/PCM
Video Standard	HDCVI/AHD/CVBS (Auto-detect)	HDCVI/AHD/CVBS (Auto-detect)	HDCVI/AHD/CVBS (Auto-detect)	HDCVI/AHD/CVBS (Auto-detect)
Max. Record Rate	480fps@1080P 480fps@720P	480fps@1080P 480fps@720P	480fps@1080P 480fps@720P	240fps@1080P 240fps@720P
CVBS Input	16CH, 1.0Vp-p, 75Ω	16CH, 1.0Vp-p, 75Ω	16CH, 1.0Vp-p, 75Ω	8CH, 1.0Vp-p, 75Ω
IP Camera Input	16+48 Up to 12Mp	16+48 Up to 12Mp	16+48 Up to 12Mp	8+56 Up to 12Mp
Max IP Input/Record	256Mbps/256Mbps	256Mbps/256Mbps	256Mbps/256Mbps	256Mbps/256Mbps
Audio In/out	16/1, 2-way	16/1, 2-way	16/1, 2-way	8/1, 2-way
Max HDD	8×8TB	4×8TB	2×8TB	2×8TB
Display	2HDMI, VGA, TV	2HDMI, VGA, TV	2HDMI, VGA	2HDMI, VGA
eSATA	1	1	1	1
USB	2 USB3.0, 2 USB2.0	2 USB3.0, 1 USB2.0	2 USB3.0, 1 USB2.0	2 USB3.0, 1 USB2.0
DVD Burner	USB/SATA	USB/SATA	USB/SATA	USB/SATA
Alarm In/Out	16/6	16/6	16/3	16/3
Ethernet	2 Gigabit ports	1 Gigabit port	2 Gigabit ports	2 Gigabit ports
Remote User Login	128	128	128	128
Dimensions	440×460×89mm (17.2"×18.1"×3.5")	440×416×68mm (17.2"×16.4"×2.7")	375×310×55mm (14.8"×12.2"×2.2")	375×310×55mm (14.8"×12.2"×2.2")
Power	AC100-240V, 50/60Hz, ≤40W(Without HDD)	AC 100-240V, 50/60Hz, ≤40W(Without HDD)	DC12V/5A, ≤35W(Without HDD)	DC12V/5A, ≤35W(Without HDD)
Intelligent Video (Optional)	Tripwire, Intrusion, Abandoned/Missing, Scene Change, Face Detection	Tripwire, Intrusion, Abandoned/Missing, Scene Change, Face Detection	Tripwire, Intrusion, Abandoned/Missing, Scene Change, Face Detection	Tripwire, Intrusion, Abandoned/Missing, Scene Change, Face Detection
Star Features	Smart Tracking/People Counting/Heat map	Smart Tracking/People Counting/Heat map	Smart Tracking/People Counting/Heat map	Smart Tracking/People Counting/Heat map

1080P Pro Series

	8 HDD			4 HDD	
Model	HCVR7816S-URH	HCVR7816S	HCVR7808S	HCVR7416L	HCVR7408L
Video Compression	H.264/MJPEG	H.264/MJPEG	H.264/MJPEG	H.264/MJPEG	H.264/MJPEG
Audio Compression	G.711/PCM	G.711/PCM	G.711/PCM	G.711/PCM	G.711/PCM
Video Standard	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)
Max. Record Rate	480fps@1080P 480fps@720P	480fps@1080P 480fps@720P	240fps@1080P 240fps@720P	480fps@1080P 480fps@720P	240fps@1080P 240fps@720P
CVBS Input	16CH, 1.0Vp-p, 75Ω	16CH, 1.0Vp-p, 75Ω	8CH, 1.0Vp-p, 75Ω	16CH, 1.0Vp-p, 75Ω	8CH, 1.0Vp-p, 75Ω
IP Camera Input	16 Up to 1080P	16+16 Up to 1080P	8+8 Up to 1080P	16+16 Up to 1080P	8+8 Up to 1080P
Max IP Input/Record	160Mbps/200Mbps	160Mbps/200Mbps	160Mbps/200Mbps	160Mbps/200Mbps	160Mbps/200Mbps
Audio In/out	16/1, 2-way	16/1, 2-way	8/1, 2-way	4/1, 2-way	4/1, 2-way
Max HDD	8×6TB	8×6TB	8×6TB	4×6TB	4×6TB
Display	2HDMI, VGA, TV	2HDMI,VGA,TV	2HDMI,VGA,TV	2HDMI,VGA,TV	2HDMI,VGA,TV
eSATA	1	1	1	1	1
USB	4 USB2.0	4 USB2.0	4 USB2.0	3 USB2.0	3 USB2.0
DVD Burner	USB/SATA	USB/SATA	USB/SATA	USB/SATA	USB/SATA
Alarm In/Out	16/6	16/6	8/6	16/6	8/6
Ethernet	2 Gigabit ports	2 Gigabit ports	2 Gigabit ports	1 Gigabit port	1 Gigabit port
Remote User Login	128	128	128	128	128
Dimensions	440×460×89mm (17.2"×18.1"×3.5")	440×460×89mm (17.2"×18.1"×3.5")	440×460×89mm (17.2"×18.1"×3.5")	440×416×68mm (17.2"×16.4"×2.7")	440×416×68mm (17.2"×16.4"×2.7")
Power	AC 100~240V, 50/60Hz, ≤53W(Without HDD)	AC 100~240V, 50/60Hz, ≤53W(Without HDD)	AC 100~240V, 50/60Hz, ≤40W(Without HDD)	AC 100~240V, 50/60Hz, ≤53W(Without HDD)	AC 100~240V, 50/60Hz, ≤40W(Without HDD)
Intelligent Video (Optional)	Tripwire, Intrusion, Scene Change, Abandoned/Missing, Face Detection	Tripwire,Intrusion,Scene Change, Abandoned/Missing,Face Detection	Tripwire,Intrusion,Scene Change, Abandoned/Missing,Face Detection	Tripwire,Intrusion,Scene Change, Abandoned/Missing,Face Detection	Tripwire,Intrusion,Scene Change, Abandoned/Missing,Face Detection
Star Features	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP, Raid	Smart play,POS,P2P, Coaxial upgrade,2D/3DNR,UTP,N+N	Smart play,POS,P2P, Coaxial upgrade,2D/3DNR,UTP,N+N	Smart play,POS,P2P, Coaxial upgrade,2D/3DNR,UTP,N+N	Smart play,POS,P2P, Coaxial upgrade,2D/3DNR,UTP,N+N

1080P Pro Series

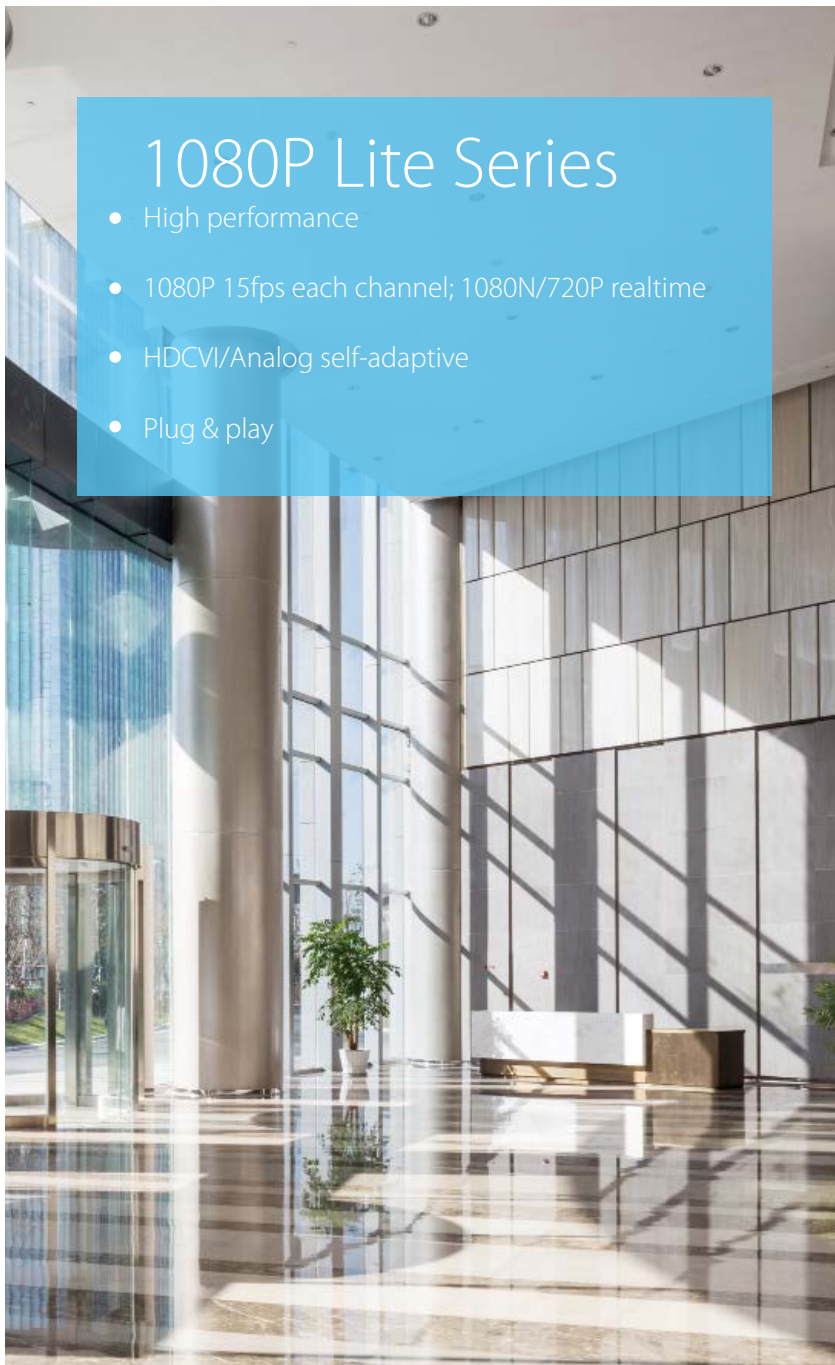


2 HDD				
	HCVR7216AN-S3	HCVR7216A-S3	HCVR7208A-S3	HCVR7204A-S3
Model				
Video Compression	H.264+/H.264	H.264+/H.264	H.264+/H.264	H.264+/H.264
Audio Compression	G.711/PCM	G.711/PCM	G.711/PCM	G.711/PCM
Video Standard	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)
Max. Record Rate	480fps@1080P 480fps@720P	480fps@1080P 480fps@720P	240fps@1080P 240fps@720P	120fps@1080P 120fps@720P
CVBS Input	16CH, 1.0Vp-p, 75Ω	16CH, 1.0Vp-p, 75Ω	8CH, 1.0Vp-p, 75Ω	4CH, 1.0Vp-p, 75Ω
IP Camera Input	16+8 Up to 5Mp	16+8 Up to 5Mp	8+4 Up to 5Mp	4+2 Up to 5Mp
Max IP Input/Record	96Mbps/96Mbps	96Mbps/96Mbps	48Mbps/48Mbps	24Mbps/24Mbps
Audio In/out	1/1, 2-way	4/1, 2-way	4/1, 2-way	4/1, 2-way
Max HDD	2×6TB	2×6TB	2×6TB	2×6TB
Display	HDMI, VGA, SPOT (Configurable)	HDMI, VGA, SPOT (Configurable)	HDMI, VGA, SPOT (Configurable)	HDMI, VGA
eSATA	--	--	--	--
USB	1 USB3.0, 1 USB2.0	1 USB3.0, 1 USB2.0	1 USB3.0, 1 USB2.0	2 USB2.0
DVD Burner	USB	USB	USB	USB
Alarm In/Out	--	16/3	8/3	8/3
Ethernet	1 Gigabit port	1 Gigabit port	1 Gigabit port	1x100M port
Remote User Login	128	128	128	128
Dimensions	375×285×55mm (14.8"×11.2"×2.2")	375×285×55mm (14.8"×11.2"×2.2")	375×285×55mm (14.8"×11.2"×2.2")	375×285×55mm (14.8"×11.2"×2.2")
Power	DC12V/5A ≤15W(Without HDD)	DC12V/5A, ≤15W(Without HDD)	DC12V/4A ≤15W(Without HDD)	DC12V/4A ≤15W(Without HDD)
Intelligent Video (Optional)	Tripwire, Intrusion, Abandoned/ Missing, Face Detection	Tripwire, Intrusion, Abandoned/ Missing, Face Detection	Tripwire, Intrusion, Abandoned/ Missing, Face Detection	Tripwire, Intrusion, Abandoned/ Missing, Face Detection
Star Features	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP











1080P Lite Series


- High performance
- 1080P 15fps each channel; 1080N/720P realtime
- HDCVI/Analog self-adaptive
- Plug & play

1080P Lite Series

	8 HDD		
	HCVR5832S-S2	HCVR5816S-V2	HCVR5808S-V2
Model			
Video Compression	H.264/MJPEG	H.264	H.264
Audio Compression	G.711/PCM	G.711/PCM	G.711/PCM
Video Standard	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)
Max. Record Rate	480fps@1080P 960fps@720P	240fps@1080P 480fps@720P	120fps@1080P 240fps@720P
CVBS Input	32CH, 1.0Vp-p, 75Ω	16CH, 1.0Vp-p, 75Ω	8CH, 1.0Vp-p, 75Ω
IP Camera Input	32 Up to 1080P	2 Up to 1080P	2 Up to 1080P
Max IP Input/Record	160Mbps/200Mbps	10Mbps/30Mbps	10Mbps/30Mbps
Audio In/out	16/1, 2-way	16/1, 2-way	8/1, 2-way
Max HDD	8×6TB	8×6TB	8×6TB
Display	2HDMI,VGA,TV,SPOT (Configurable)	HDMI, VGA, TV	HDMI, VGA, TV
eSATA	1 eSATA port	1 eSATA port	1 eSATA port
USB	4 USB2.0	4 USB2.0	4 USB2.0
DVD Burner	USB/SATA	USB/SATA	USB/SATA
Alarm In/Out	16/6	16/6	8/6
Ethernet	2 Gigabit ports	2 Gigabit ports	2 Gigabit ports
Remote User Login	128	128	128
Dimensions	440×460×89mm (17.2"×18.1"×3.5")	440×460×89mm (17.2"×18.1"×3.5")	440×460×89mm (17.2"×18.1"×3.5")
Power	AC 100~240V, 50/60Hz, ≤53W (Without HDD)	AC 100~240V, 50/60Hz, ≤40W (Without HDD)	AC 100~240V, 50/60Hz, ≤40W (Without HDD)
Intelligent Video (Optional)	Tripwire, Intrusion, Scene Change, Abandoned/Missing, Face Detection	-	-
Star Features	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP



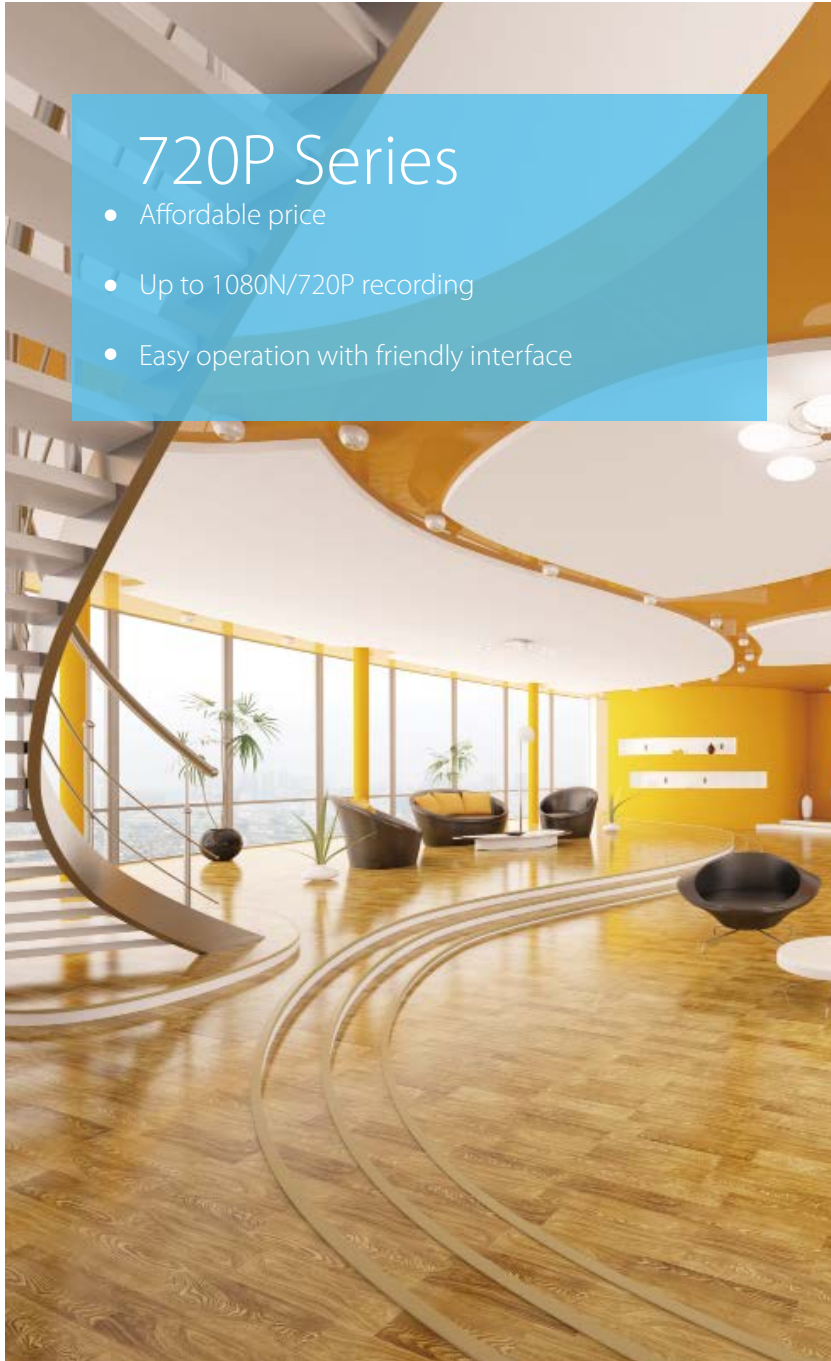


1080P Lite Series

	4 HDD			2 HDD				
Model	HCVR5432L-S2	HCVR5416L-V2	HCVR5408L-V2	HCVR5232AN-S3	HCVR5216AN-S3	HCVR5216A-S3	HCVR5208A-S3	HCVR5204A-S3
								
Video Compression	H.264	H.264	H.264	H.264+/H.264	H.264+/H.264	H.264+/H.264	H.264+/H.264	H.264+/H.264
Audio Compression	G.711/PCM	G.711/PCM	G.711/PCM	G.711/PCM	G.711/PCM	G.711/PCM	G.711/PCM	G.711/PCM
Video Standard	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)	HDCVI/CVBS(Auto-detect)
Max. Record Rate	480fps@1080P 960fps@720P	240fps@1080P 480fps@720P	120fps@1080P 240fps@720P	480fps@1080P 960fps@720P	240fps@1080P 480fps@1080N(or 720P)	240fps@1080P 480fps@1080N(or 720P)	120fps@1080P 240fps@1080N(or 720P)	60fps@1080P 120fps@1080N(or 720P)
CVBS Input	32CH, 1.0Vp-p, 75Ω	16CH, 1.0Vp-p, 75Ω	8CH, 1.0Vp-p, 75Ω	32CH, 1.0Vp-p, 75Ω	16CH, 1.0Vp-p, 75Ω	16CH, 1.0Vp-p, 75Ω	8CH, 1.0Vp-p, 75Ω	4CH, 1.0Vp-p, 75Ω
IP Camera Input	32 Up to 1080P	2 Up to 1080P	2 Up to 1080P	16 Up to 5MP	16+8 Up to 5Mp	16+8 Up to 5Mp	8+4 Up to 5Mp	4+2 Up to 5Mp
Max IP Input/Record	160Mbps/200Mbps	10Mbps/30Mbps	10Mbps/30Mbps	64Mbps/64Mbps	96Mbps/96Mbps	96Mbps/96Mbps	48Mbps/48Mbps	24Mbps/24Mbps
Audio In/out	4/1, 2-way	4/1, 2-way	4/1, 2-way	1/1, 2-way	1/1, 2-way	4/1, 2-way	4/1, 2-way	4/1, 2-way
Max HDD	4x6TB	4x6TB	4x6TB	2x6TB	2x6TB	2x6TB	2x6TB	2x6TB
Display	HDMI,VGA,SPOT (Configurable)	HDMI, VGA, TV	HDMI, VGA, TV	HDMI,VGA,TV,SPOT (configurable)	HDMI, VGA, SPOT (Configurable)	HDMI, VGA, SPOT (Configurable)	HDMI, VGA	HDMI, VGA
eSATA	1 eSATA port	1 eSATA port	1 eSATA port	--	--	--	--	--
USB	3 USB2.0	3 USB2.0	3 USB2.0	1 USB3.0, 1 USB2.0	1 USB3.0, 1 USB2.0	1 USB3.0, 1 USB2.0	2 USB2.0	2 USB2.0
DVD Burner	USB/SATA	USB/SATA	USB/SATA	USB	USB	USB	USB	USB
Alarm In/Out	16/6	16/6	8/6	--	--	16/3	8/3	8/3
Ethernet	1 Gigabit port	1 Gigabit port	1 Gigabit port	1 Gigabit port	1 Gigabit port	1 Gigabit port	1x100M port	1x100M port
Remote User Login	128	128	128	128	128	128	128	128
Dimensions	440x416x68mm (17.2"x16.4"x2.7")	440x416x68mm (17.2"x16.4"x2.7")	440x416x68mm (17.2"x16.4"x2.7")	375x285x55mm (14.8"x11.2"x2.2")	375x285x55mm (14.8"x11.2"x2.2")	375x285x55mm (14.8"x11.2"x2.2")	375x285x55mm (14.8"x11.2"x2.2")	375x285x55mm (14.8"x11.2"x2.2")
Power	AC 100~240V, 50/60Hz, ≤53W (Without HDD)	AC 100~240V, 50/60Hz, ≤40W (Without HDD)	AC 100~240V, 50/60Hz, ≤40W (Without HDD)	DC12V/5A, ≤25W(Without HDD)	DC12V/4A, ≤15W(Without HDD)	DC12V/4A, ≤15W(Without HDD)	DC12V/4A, ≤15W(Without HDD)	DC12V/4A, ≤15W(Without HDD)
Intelligent Video (Optional)	Tripwire,Intrusion,Scene Change,Abandoned/ Missing,Face Detection	-	-	Tripwire, Intrusion, Abandoned/ Missing, Face Detection	Tripwire, Intrusion, Abandoned/ Missing, Face Detection	Tripwire, Intrusion, Abandoned/ Missing, Face Detection	Tripwire, Intrusion, Abandoned/ Missing, Face Detection	Tripwire, Intrusion, Abandoned/ Missing, Face Detection
Star Features	Smart play,POS,P2P,Coaxial upgrade,2D/3DNR,UTP	Smart play,POS,P2P,Coaxial upgrade,2D/3DNR,UTP	Smart play,POS,P2P,Coaxial upgrade,2D/3DNR,UTP	Smart play,POS,P2P,Coaxial upgrade,2D/3DNR,UTP	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP



720P Series

- Affordable price
- Up to 1080N/720P recording
- Easy operation with friendly interface

720P Series					
	2 HDD				
	HCVR4232AN-S3	HCVR4216AN-S3	HCVR4216A-S3	HCVR4208A-S3	HCVR4204A-S3
Model					
Video Compression	H.264	H.264	H.264	H.264	H.264
Audio Compression	G.711/PCM	G.711/PCM	G.711/PCM	G.711/PCM	G.711/PCM
Video Standard	HDCVI/CVBS (Auto-detect)	HDCVI/CVBS (Auto-detect)	HDCVI/CVBS (Auto-detect)	HDCVI/CVBS (Auto-detect)	HDCVI/CVBS(Auto-detect)
Max. Record Rate	480fps@1080N 480fps@720P	240fps@1080N 240fps@720P	240fps@1080N 240fps@720P	120fps@1080N 120fps@720P	120fps@1080N 120fps@720P
CVBS Input	32CH, 1.0Vp-p, 75Ω	16CH, 1.0Vp-p, 75Ω	16CH, 1.0Vp-p, 75Ω	8CH, 1.0Vp-p, 75Ω	4CH, 1.0Vp-p, 75Ω
IP Camera Input	16 Up to 5Mp	16+2 Up to 5Mp	16+2 Up to 5Mp	8+2 Up to 5Mp	4+1 Up to 2Mp
Max IP Input/Record	64Mbps/64Mbps	72Mbps/72Mbps	72Mbps/72Mbps	40Mbps/40Mbps	20Mbps/20Mbps
Audio In/out	1/1, 2-way	1/1, 2-way	4/1, 2-way	4/1, 2-way	4/1, 2-way
Max HDD	2×6TB	2×6TB	2×6TB	2×6TB	2×6TB
Display	HDMI,VGA,TV,SPOT (configurable)	HDMI, VGA	HDMI, VGA	HDMI, VGA	HDMI, VGA
eSATA	--	--	--	--	--
USB	1 USB3.0, 1 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0	2 USB2.0
DVD Burner	USB	USB	USB	USB	USB
Alarm In/Out	--	--	16/3	8/3	8/3
Ethernet	1 Gigabit port	1x100M port	1x100M port	1x100M port	1x100M port
Remote User Login	128	128	128	128	128
Dimensions	375×285×55mm (14.8"×11.2"×2.2")	375×285×55mm (14.8"×11.2"×2.2")	375×285×55mm (14.8"×11.2"×2.2")	375×285×55mm (14.8"×11.2"×2.2")	375×285×55mm (14.8"×11.2"×2.2")
Power	DC12V/5A, ≤20W(Without HDD)	DC12V/4A, ≤15W(Without HDD)	DC12V/4A, ≤15W(Without HDD)	DC12V/4A, ≤15W(Without HDD)	DC12V/4A, ≤15W(Without HDD)
Star Features	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP	Smart play, POS, P2P, Coaxial upgrade, 2D/3DNR, UTP

Accessories



ACCESSORIES

HFxx, HFxxE Series		
		
Model	PFB110W	PFB121W
Mount	Wall/ceiling/plane mount	Wall mount

HFWxxE, HFWxxE-Z Series		
		
Model	PFA121	PFA121+PFA152
Mount	Junction box	Pole mount

HFWxxR-VF/Z, HFWxxB, HFWxxD Series		
		
Model	PFA135	PFA135+PFA150
Mount	Junction box	Pole mount

HFWxxS, HFWxxSL, HFWxxR, HFWxxRM Series		
		
Model	PFA134	PFA134+PFA150
Mount	Junction box	Pole mount

HDBW3231E-Z					
					
Model	PFA138	PFA101+PFB302S	PFA101+PFB302S+PFA152	PFA101+PFB300C	PFB201C
Mount	Junction box	Wall mount	Pole mount	Ceiling mount	In-ceiling mount

ACCESSORIES

HDBWxxR-Z/VF series				
				
Model	PFA137	PFB203W	PFB203W+PFA152	PFB200C
Mount	Junction box	Wall mount	Pole mount	In-ceiling mount




HDWxxR-Z Series			
			
Model	PFA137	PFB203W	PFB203W+PFA152
Mount	Junction box	Wall mount	Pole mount

HDWxxR-VF Series			
			
Model	PFA13B	PFB204W	PFB204W+PFA152
Mount	Junction box	Wall mount	Pole mount

HDBWxxE, HDWxxE, HDWxxS Series			
			
Model	PFA136	PFB203W	PFB203W+PFA152
Mount	Junction box	Wall mount	Pole mount

HDWxxM Series			
			
Model	PFA13A	PFB204W	PFB204W+PFA152
Mount	Junction box	Wall mount	Pole mount

HDWxxEM, HDBWxxF Series			
			
Model	PFA139	PFB204W	PFB204W+PFA152
Mount	Junction box	Wall mount	Pole mount

HDWxxR Series		
		
Model	PFA122	PFA122+PFA152
Mount	Junction box	Pole mount

ACCESSORIES

SD60 Series							
							
Model	PFA111+PFB303W	PFA111+PFB303W+PFA120	PFA111+PFB300C	PFA150	PFA151	PFA140	PFA111+PFB303S
Mount	Wall mount	Junction box	Ceiling mount	Pole mount	Corner mount	Power box	Parapet mount

SD6CE Series							
							
Model	PFA114+PFB303W	PFA114+PFB303W+PFA120	PFA114+PFB300C	PFA150	PFA151	PFA140	PFA114+PFB303S
Mount	Wall mount	Junction box	Ceiling mount	Pole mount	Corner Mount	Power box	Parapet mount

SD6C Series							
							
Model	64FB	PFA114+PFB300C	PFA150	PFA151	PFA140	PFA114+PFB303S	
Mount	Wall mount	Ceiling mount	Pole mount	Corner mount	Power box	Parapet mount	

ACCESSORIES

SD59/50/40 Series							
							
Model	PFA110+PFB300S	PFA110+PFB300S+PFA120	PFA110+PFB300C	PFA150	PFA151	PFA140	PFA110+PFB303S
Mount	Wall mount	Junction box	Ceiling mount	Pole mount	Corner mount	Power box	Parapet mount

SD49 Series							
							
Model	PFB305W	PFB305W+PFA120	PFA111+PFB300C	PFA150	PFA151	PFA140	PFA111+PFB303S
Mount	Wall mount	Junction box	Ceiling mount	Pole mount	Corner Mount	Power box	Parapet mount


SD42 Series							
							
Model	PFA102+PFB302S	PFA102+PFB302S+PFA150	PFA102+PFB302S+PFA151	PFA102+PFB300C			
Mount	Wall mount	Pole mount	Corner mount	Ceiling mount			


SD22 Series							
							
Model	PFA137	PFB202W	PFB202W+PFA152	PFB200C			
Mount	Junction box	Wall mount	Pole mount	In-ceiling mount			


Housing						
Model	PFH600N	PFH610N/V/A	PFH610N/V/A-H	PFH610N/V/A-IR	PFH610N-W	PFH610N-IR-W
Appearance						
Description	ASA&PC N/A IP66 DC12V/AC24V in 312x133x103mm (12.28"x5.24"x4.06")	Aluminum & PC N/A IP67/ IP67&IK10/ IP67&IK10&NEMA 4X DC12V/ AC24V in 404.0x163.8x132.1mm (15.9"x6.45"x5.2")	Aluminum & PC Heater, cooler IP67/ IP67&IK10/ IP67&IK10&NEMA 4X AC24V, 3A in 404.0x163.8x132.1mm (15.9"x6.45"x5.2")	Aluminum & PC Heater, cooler, IR IP67/ IP67&IK10/ IP67&IK10&NEMA 4X AC24V, 5A in 404.0x163.8x132.1mm (15.9"x6.45"x5.2")	Aluminum & PC Heater, cooler, wiper IP66 AC24V, 3A in 404.0x163.8x174.7mm (15.9"x6.45"x6.88")	Aluminum & PC Heater, cooler, wiper, IR IP66 AC24V, 5A in 404.0x163.8x174.7mm (15.9"x6.45"x6.88")



Lens		
Model	PLZ1040-D	PLZ1140-D
Appearance		
Description	Image size: 1/2.7" Aperture: F1.6 Focus length: 2.7-12mm Mount: CS Resolution: 4MP	Image size: 1/2.7" Aperture: F1.6 Focus length: 5-50mm Mount: CS Resolution: 4MP





Power Supply			
Model	AC Power		
Appearance			
Description	AC24V, 1.5A 106x70x56.5mm (4.17"x2.76"x2.22")	AC24V, 3A 120x80x63.5mm (4.72"x3.15"x2.5")	AC24V, 5A 120x102x80mm (4.72"x4.0"x3.15")




Tool	
Model	PFM900
Appearance	
Description	Integrated Mount Tester For IPC, HDCVI, Analog camera TDR, record, playback, etc.

Balun			
Model	PFM800	PFM801	PFM809
Appearance			
Description	Passive HDCVI Balun Transmission distance: 720P: max.450m(1476.4ft) 1080P: max.300m(984.3ft) Cable type: CAT 5E/6 (R<10Ω/100m)	Passive HDCVI Balun With Power Input: DC24-36V Output: max.DC12V 8W Transmission distance: max.100m(984.3ft) Cable type: CAT 5E/6 (R<10Ω/100m)	16Channel Passive HDCVI Balun Receiver Transmission distance: 0-450m(0-1476.4ft) (with passive transmitter) Cable type: CAT 5E/6 (R<10Ω/100m)

POC	
Model	PFM810
Appearance	
Description	POC Transceiver Input: DC24-36V Output: max.DC12V 9W Transmission distance: max.400m(1312.3ft) Cable type: RG59/6

Pickup		
Model	PFM140	PFM141
Appearance		
Description	Pinhole Pickup Input DC12V Scope: 5-40m ² Sensitivity: -40dB 63x30x22mm (2.48"x1.18"x0.87")	Hi-fidelity Pickup Input DC12V Scope: 5-100m ² Sensitivity: -32dB φ78x26mm (3.1"x3.1"x1.0")

Optical Transceiver				
Model	OTC102T/R	PFO2410T/R	PFO2810T/R	PFO2910T/R
Appearance				
Description	<ul style="list-style-type: none"> • 1ch HDCVI Optical Transceiver • Lossless non-compression real-time transmission • FC, Single-mode, 20km • Support 720P/1080P 	<ul style="list-style-type: none"> • 4ch HDCVI Optical Transceiver • Lossless non-compression real-time transmission • FC, Single-mode, 20km • Support 720P/1080P 	<ul style="list-style-type: none"> • 8ch HDCVI Optical Transceiver • Lossless non-compression real-time transmission • FC, Single-mode, 20km • Support 720P/1080P 	<ul style="list-style-type: none"> • 16ch HDCVI Optical Transceiver • Lossless non-compression real-time transmission • LC, Single-mode, 20km • Support 720P/1080P



Converter		Distributor		Matrix
Model	TP2105	TP2600	PFT2690	CMX
Appearance				
Description	<ul style="list-style-type: none"> • Input :720P/1080P HDCVI signal • Output: HDCVI, HDMI, VGA, CVBS • Support RS485 to control PTZ 	<ul style="list-style-type: none"> • 1 in/3 out • 720P/1080P self-adaptive • Work as a repeater to increase the transmission distance 	<ul style="list-style-type: none"> • 16-ch HDCVI input, 32-ch output, each input is corresponding to 2 outputs • 720P/1080P self-adaptive • Compatible CVBS, AHD, HDTV signal distribution 	<ul style="list-style-type: none"> • Support HDCVI 1080P/720P, CVBS • 17 business card, 7U chassis • Support cascade between matrix • Single matrix supports max 256 in and 16 out • No delay, real-time video switch

Monitor				
Model	DHL22-F600	DHL32-F600	DHL43-F600	
Appearance				
Description	<ul style="list-style-type: none"> • Built-in 3D DNR • Support 1ch audio input • 1920x1080 resolution • Angle of view: 130°/178° • Interfaces: VGA(D-Sub)×1, HDMI×1, built-in speaker 	<ul style="list-style-type: none"> • Built-in 3D DNR • Support 1ch audio input • 1920x1080 resolution • Angle of view: 178°/178° • Interfaces: VGA(D-Sub)×1, HDMI×2, built-in speaker 	<ul style="list-style-type: none"> • Built-in 3D DNR • Support 1ch audio input • 1920x1080 resolution • Angle of view: 178°/178° • Interfaces: VGA(D-Sub)×1, HDMI×1, built-in speaker 	

Smart PSS

Smart Professional Surveillance System

Dahua Security Management Platform

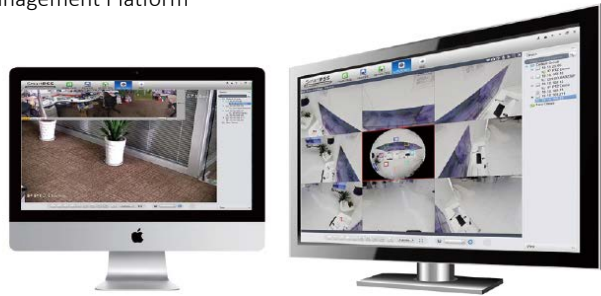

Fish-eye image Correction



People Counting



Video Intercom



Access Control System

Supported OS	Windows/Mac OSX
Supported Devices	CCTV/VDP/ACS
Number of Devices	256
Number of Channels	2000
Number of Screens	4
Recording Channels	32
Languages	18
Supported VTO	100
Supported VTH	50000
Supported Access Controllers	200
Supported Doors	1000
Basic Functions	Preview, Record, Playback, Export, Snapshot, Instant playback
Smart Features	Fisheye correction, People counting, Smart search, E-Map, E-PTZ
Smart Building	Video intercom, Access control

DMSS

Digital Mobile Surveillance System

Monitor Anything with Your SmartPhone or Tablet Anytime, Anywhere



Devices	Supported Devices	DVR, NVR, IPC, VTO
	Add Device Method	IP/domain, SN, Import from cloud
	Features	Remote config, Alarm config, HDD info, Share device list
Video	Compression Format	H.265/H.264/MPEG-4/JPEG
	Display Resolution	Up to 1920 x 1080
Live Preview	Max. Channels Can Be Opened at The Same Time	256
	Features	Snapshot, Record, Instant playback, PTZ, Stream control, Talk, Audio, Alarm, Color, Favorites, Remember channels
Playback	Time Period of Video Playback	72 hours
	Features	Snapshot, Record, Faster/slower play, Play next frame, Cut
Alarm Push	Alarm Type	Motion detect, Camera masking, Local alarm, Disk alarm(no disk, Low space, disk Error), Face detection, Ivs alarm
	Push Type	Video, Preview, Image

Easy4ip Cloud

- Global server coverage, based on Amazon
- Encryption to secure your personal data
- Push alarm, monitor your home or store in real-time
- Easy device upgrade from cloud

Easy4ip Cloud

The most user-friendly surveillance cloud platform

Make your video surveillance mobile



Devices	Supported Devices	DVR, NVR, IPC
	Add Device Method	SN, Wi-Fi config
	Features	Search, Sort, Favorites, Cloud upgrade, Modify password, Device share
Video	Compression Format	H.265/H.264/MPEG-4/JPEG
	Display Resolution	Up to 1920 x 1080
Live Preview	Video Display Split	1/4/9/16 split
	Max. Channels Can Be Opened at The Same Time	256
	Features	Snapshot, Record, PTZ, Stream control, Talk, Audio, Alarm, Favorites
Playback	Storage Media	HDD/SD/Cloud
	Time Period of Video Playback	24 hours
	Features	Snapshot, Record, Faster/Slower play, Play next frame
Alarm Push	Alarm Type	Motion detect, Camera masking, Local alarm, Disk alarm(no disk, low space, disk Error), Face detection, lvs alarm
	Push Type	Video, Live, Image

Easy4ip APP





*DAHUA TECHNOLOGY...
...MAKE YOUR LIFE SAFER*

Distributed by

* Design and specifications are subject to change without notice.

HDCVI Product Selection -03, July 2016



www.dahuasecurity.com

DAHUA TECHNOLOGY CO., LTD.

No.1199 Bin'an Road, Binjiang District, Hangzhou, China. 310053
Tel: +86-571-87688883 Fax: +86-571-87688815
Email: overseas@dahuatech.com
www.dahuasecurity.com



© Dahua Technology, All rights reserved